



POWER CHUCK



FEATURES:

- The 'KTA' Power Chuck is very Rigid & Precision.
- It is best for drilling, reaming, milling operations.
- The tool runs true less than 5 micron on 2D. Hence the tool life increases dramatically.
- It has unibody construction & hence no vibrations, this also increases tool life.
- Take the maximum advantages of high precision & high rigidity by using KTA Power Chuck

KTA Spindle Toolings

Works : 246/9, Hinjewadi, Near Tata Jhonson,
Tal. Mulshi, Dist. Pune. Pin - 411 057.
(MAHARASHTRA) INDIA


Tel. Works : 020 -64001283, 22934198, 20270680.

Fax Works : 020 - 66740038,66740039

E-mail : info@ktaspindletoolings.com
sales@ktaspindletoolings.com
exports@ktaspindletoolings.com

Visit us at : www.ktaspindletoolings.com

POWER CHUCK

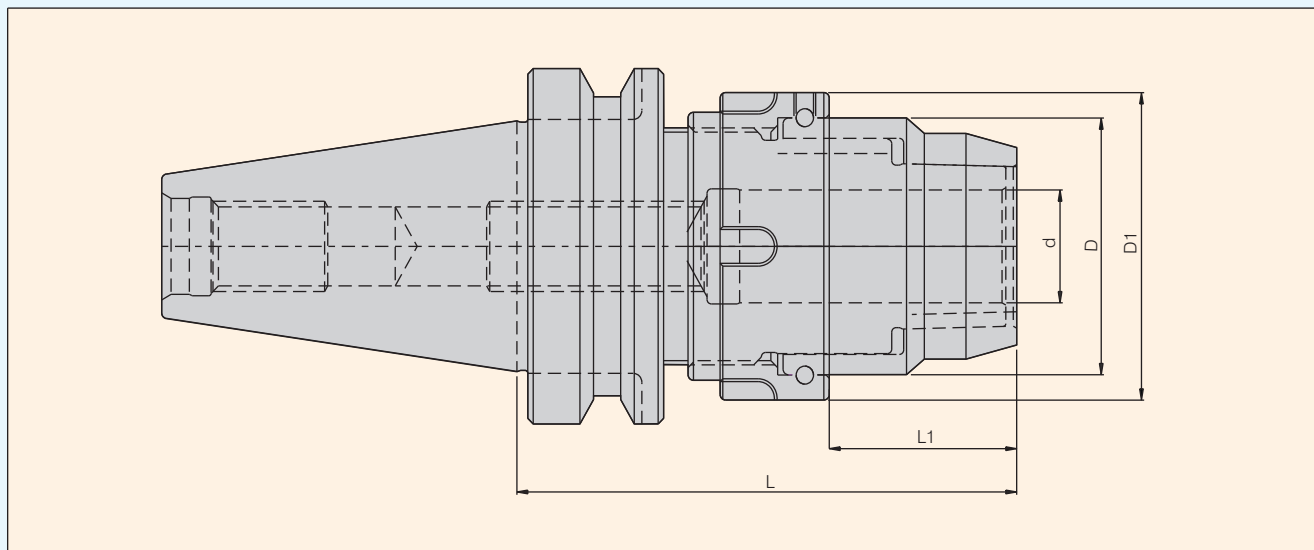

BT-MAS 403 SPECIFICATIONS

Description	Shank	d mm.	D mm.	D1 mm.	L mm.	L1 mm.
BT40PowerChuck 06078	BT 40	6.0	28.50	37.5	78	25
BT40PowerChuck 08078	BT 40	8.0	28.50	37.5	78	25
BT40PowerChuck 10088	BT 40	10.0	35.50	44.5	88	31.5
BT40PowerChuck 12088	BT 40	12.0	35.50	44.5	88	31.5
BT40PowerChuck 16090	BT 40	16.0	40.50	49.5	90	32.5
BT40PowerChuck 20092	BT 40	20.0	45.50	54.5	92	34.5
BT40PowerChuck 25098	BT 40	25.0	59.50	68.5	98	39
BT40PowerChuck 32106	BT 40	32.0	64.50	73.5	106	43.5
BT50PowerChuck 06089	BT 50	6.0	28.50	37.5	89	25
BT50PowerChuck 08089	BT 50	8.0	28.50	37.5	89	25
BT50PowerChuck 10099	BT 50	10.0	35.50	44.5	99	31.5
BT50PowerChuck 12099	BT 50	12.0	35.50	44.5	99	31.5
BT50PowerChuck 16101	BT 50	16.0	40.50	49.5	101	32.5
BT50PowerChuck 20103	BT 50	20.0	45.50	54.5	103	34.5
BT50PowerChuck 25109	BT 50	25.0	59.50	68.5	109	39
BT50PowerChuck 32117	BT 50	32.0	64.50	73.5	117	43.5

CT (DIN 69871) SPECIFICATIONS

Description	Shank	d mm.	D mm.	D1 mm.	L mm.	L1 mm.
CT40PowerChuck 06086	CT 40	6.0	28.50	37.5	86	25
CT40PowerChuck 08086	CT 40	8.0	28.50	37.5	86	25
CT40PowerChuck 10096	CT 40	10.0	35.50	44.5	96	31.5
CT40PowerChuck 12096	CT 40	12.0	35.50	44.5	96	31.5
CT40PowerChuck 16098	CT 40	16.0	40.50	49.5	98	32.5
CT40PowerChuck 20100	CT 40	20.0	45.50	54.5	100	34.5
CT40PowerChuck 25106	CT 40	25.0	59.50	68.5	106	39
CT40PowerChuck 32114	CT 40	32.0	64.50	73.5	114	43.5
CT50PowerChuck 06086	CT 50	6.0	28.50	37.5	86	25
CT50PowerChuck 08086	CT 50	8.0	28.50	37.5	86	25
CT50PowerChuck 10096	CT 50	10.0	35.50	44.5	96	31.5
CT50PowerChuck 12096	CT 50	12.0	35.00	44.5	96	31.5
CT50PowerChuck 16098	CT 50	16.0	40.50	49.5	98	32.5
CT50PowerChuck 20100	CT 50	20.0	45.50	54.5	100	34.5
CT50PowerChuck 25106	CT 50	25.0	59.50	68.5	106	39
CT50PowerChuck 32114	CT 50	32.0	64.50	73.5	114	43.5